

# B-50 CHAR BROILER

B-50 CHAR BROILER



Wells B-50 Countertop Broiler has a stainless steel top and sides that make this broiler one of the most durable in the industry. Self-cleaning elements are protected by heavy-duty cast-iron grates and provide two heat zones for flexibility in broiling.

## Specifications

<b>Overall Dimensions:</b>	<b>Inches</b>	<b>MM</b>
Width	36 1/2	927
Depth	29 9/16	751
Height (incl. 4" legs)	15 3/8	391
<b>Grid Surface Dimensions:</b>		
Width	32	813
Depth	20	508
Area	640 in <sup>2</sup>	0.41 m <sup>2</sup>
<b>Temperature Settings:</b>	OFF/LO to HI	
<b>Number of Controls:</b>	2	
<b>Pre-Heat Time to 600° F:</b>	10 minutes	
<b>Typical Production</b>	<b>Per Load</b>	<b>Per Hour</b>
Hamburgers	50	700
Steaks	18	160
<b>Weights:</b>	<b>Lbs.</b>	<b>KG</b>
Installed	151	68
Shipping	159	72

## Features


- **Each self-cleaning element** is positioned between the broiler grate ribs to protect against direct food contact and spatula abrasion. The elements also provide dual heating action (conductive and radiant).
- **Temperature** is regulated by infinite controls that have a positive-off position and signal lights to indicate a power-on condition.
- **Element frame** has a spring-loaded support rod to secure element when in a raised position.
- **Lift-out, drawn drip pans with handles** and removable **cast iron grates** allow fast and easy cleaning.
- **Individual controls** regulate one half of the grid surface area for cooking versatility and are mounted with a protective guard ring to help prevent accidental temperature changes.
- **A terminal block** is provided for field connection to the main power supply.
- Each unit is provided with a **grate scraper/brush and 4" adjustable metal legs**.
- **The B-50 Broiler** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

### Export

The following model is available for export and meets the standards for CE:

- **B-50EU**, 380-415V, 3Ø, 10800 watts






## MODEL B-50 CHAR BROILER

### DIMENSIONS:

INCH  
(MM)

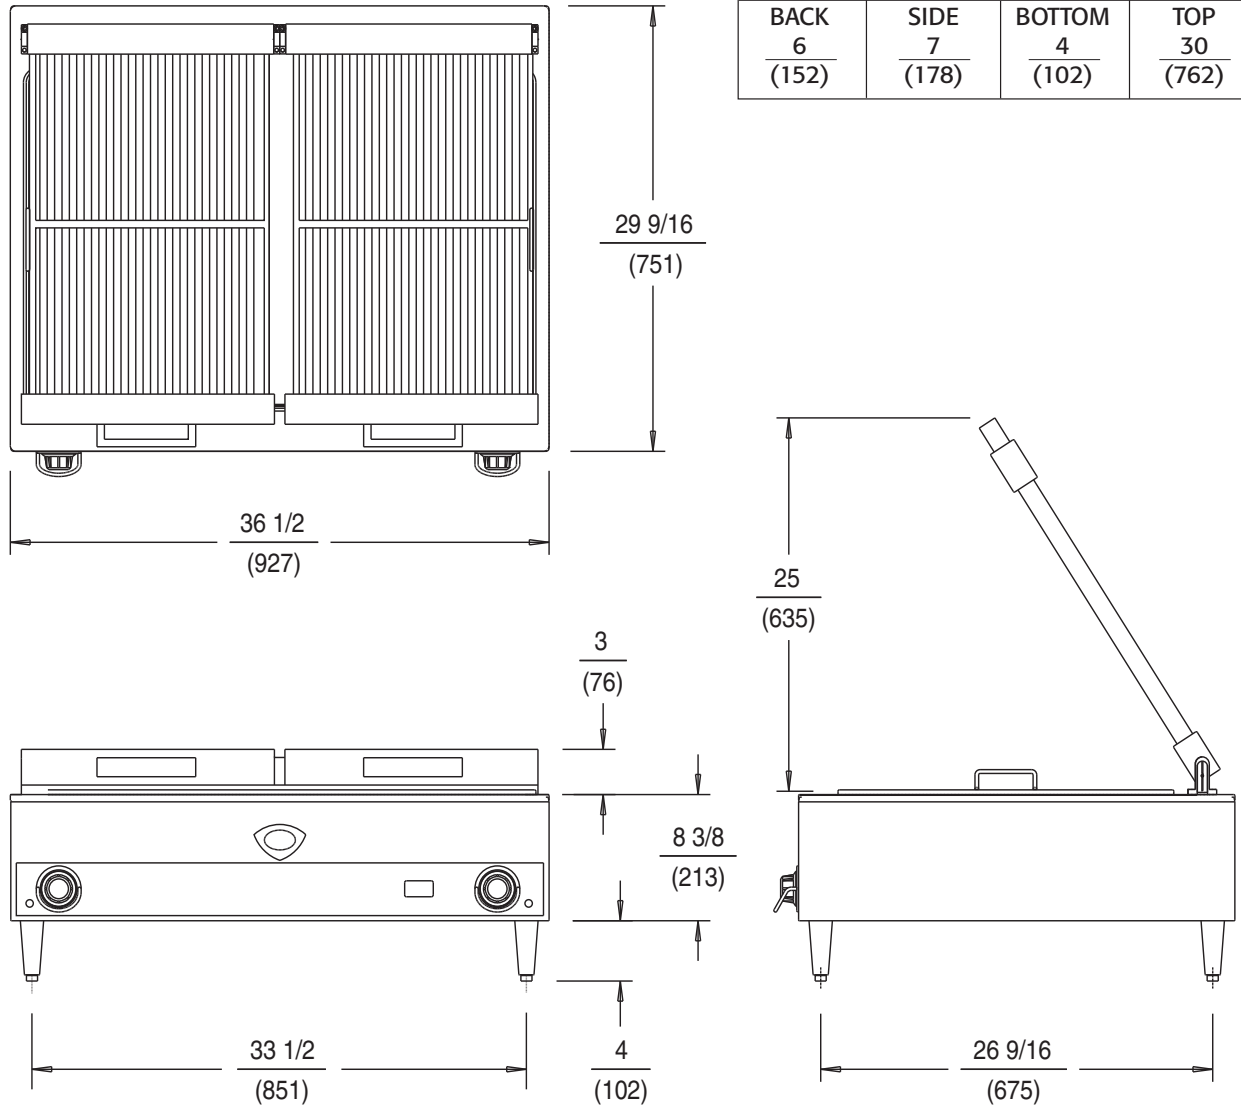

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST COMBUSTIBLE OBJECT.			
BACK	SIDE	BOTTOM	TOP
$\frac{6}{(152)}$	$\frac{7}{(178)}$	$\frac{4}{(102)}$	$\frac{30}{(762)}$

### B-50 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
B-50	208	10800	30.0	30.0	30.0	-	-	NONE
B-50	240	10800	26.0	26.0	26.0	-	45.0	NONE
● B-50EU	380-415	10800	15.0	15.0	15.0	-	-	NONE

● Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

