



ELECTRICAL

MODEL	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS SINGLE PHASE	FIELD WIRING GAUGE		TEMP. RATING
			L1	L2	L3		3 PHASE	1 PHASE	
G-196	208	12000	28.8	49.9	28.8	57.6	6	6	90°C
G-196	240	12000	25.0	43.3	25.0	50.0	8	8	90°C
G-196	480	12000	12.5	21.7	12.5	25.0	10	10	90°C

CUTOUT DETAILS

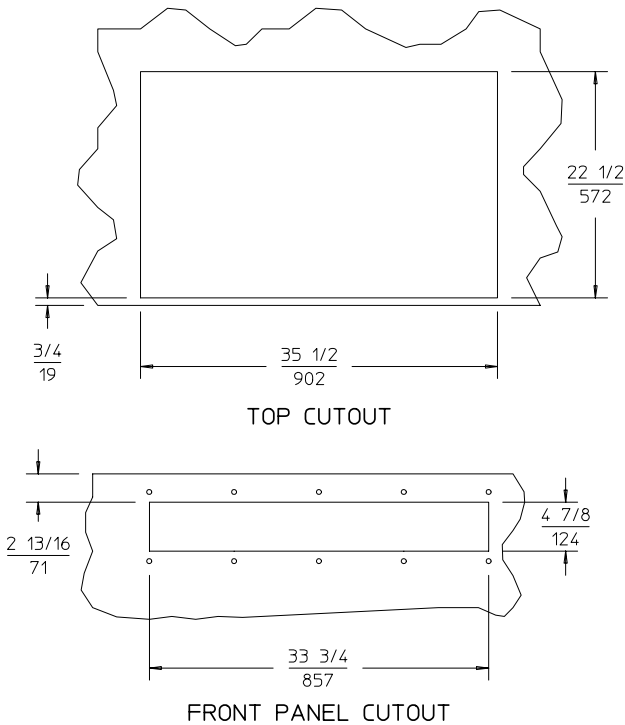

PRODUCT DIMENSIONS

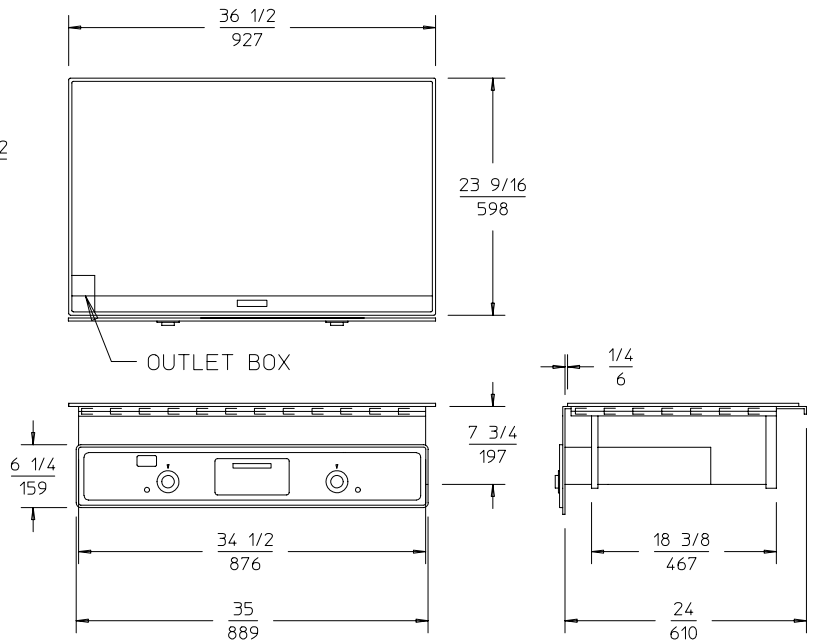

CLEARANCES

MINIMUM CLEARANCE REQUIRED UNIT TO THE NEAREST SURFACE		
BACK	SIDE	BOTTOM
<u>1</u>	<u>2</u>	<u>9</u>
(25)	(50)	(229)

SEE CONDITIONS OF ACCEPTABILITY BELOW

INSTALLATION INSTRUCTIONS

UNIT MUST BE INSTALLED IN AN ALL METAL COUNTER

THE INSTALLATION OF RECOGNIZED COMPONENT UNITS REQUIRES ADDITIONAL EVALUATIONS TO UNDERWRITERS LABORATORIES INC. STANDARDS.

INSTALLER MUST MEET CONDITIONS OF ACCEPTABILITY OUTLINED BELOW UPON INSTALLATION:

1. This appliance shall be installed in an all metal counter with suitable wiring and control enclosures conforming to national and local electrical codes.
2. Electrical component temperatures, including wiring, within and surrounding the appliance must be monitored in the end use installation for suitability.
3. Electrical grounding of all dead metal parts must be reliably connected to the grounding means of the appliance and must comply with requirements outlined in the appropriate Underwriters Laboratories Inc. classification, national and local electrical codes.
4. Increased clearances are required if storage of combustible materials is in close proximity to this appliance.

5. Unit shall be accessible for servicing from bottom.
6. The name/rating information shall be accessible.

TO FABRICATE:

1. Layout cutout dimensions on countertop and control panel as per drawing.
2. Layout and fabricate control panel holes in counter apron using angles (supplied) as templates.
Note: If stiffening is used around perimeter of countertop cutout, total thickness of stiffener plus top cannot exceed 3/16". Also, make certain stiffener design does not interfere with operation of "ears" on Wellslok flange. Use of additional stiffener will provide more strength around countertop opening and will provide a more even seal.
3. Griddle shall be accessible for servicing from the bottom.

TO INSTALL: (See conditions of Acceptability).

1. Remove knob and screws holding the thermostats to front panel. Remove grease drawer. Disconnect wire from pilot lights. This will remove control panel from griddle. Do NOT disconnect wires from thermostats.
2. Caulk underside periphery of griddle flange with a bead of silicone adhesive/sealant. This will assure a more effective seal between countertop and griddle gasket. Lower thermostat through countertop opening and position griddle on counter.
3. From underneath, insert screwdriver into "slots" on patented Wellslok frame and twist "ears" (clockwise) to secure flange tightly to countertop.
4. Remount the thermostats to control panel. Reconnect pilot light wire to pilot light. CAUTION: Be extremely careful the pilot light wires are replaced in their original order.
5. Connect service leads to terminal block in the outlet box provided.
6. Slide grease drawer track forward and secure to control panel. Check to see that wiring is routed properly away from drawer track.
7. Secure control panel to counter apron. Be certain the thermostat capillary tubing is clear of all hot terminals.